



E Designs & Installations

PVC CEILINGS

SPC FLOORING

ARTIFICIAL GRASS



3D Wall Art

3D wall art offers a modern and trendy wall cover that can turn a standard wall into a magnificent work of art. Our range of 3D Wall Art offers a collection of contemporary wall textures that can be used as a feature or as a complete surface cover.


This product can easily be installed by simply applying a layer of acrylic adhesive to the back of the 3D panel and securing the panel to the wall.

3D Wall Art is ideal for residential and commercial projects such as Home Interiors, Hotels, Office lobbies, Restaurants, Exhibition spaces, Retail Outlets and many more.


Together, our 3D Wall Art forms a repeating pattern that can be sprayed or painted in any desired color.

3D Wall Art


500mm x 500mm (4 panels per box = 1sqm)

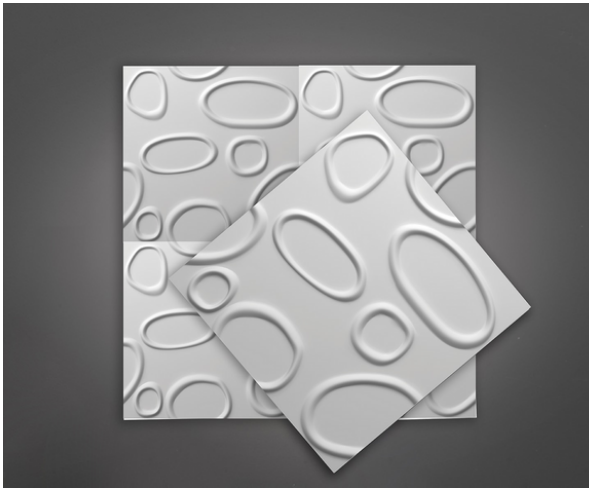


Calypso

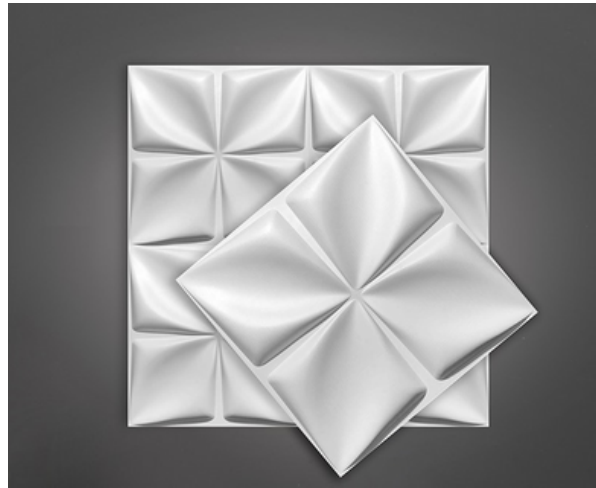


Flower

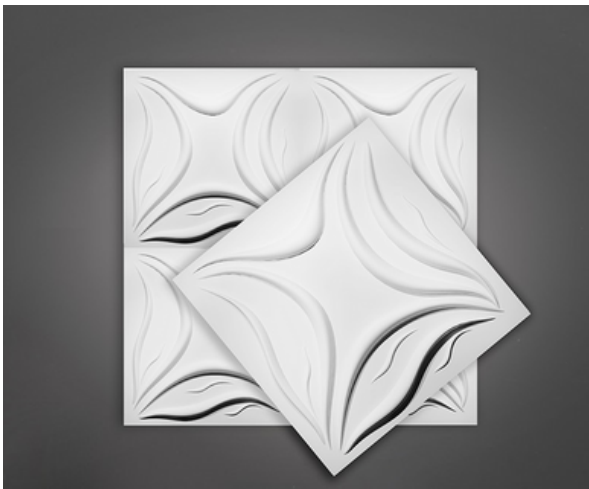

Lily

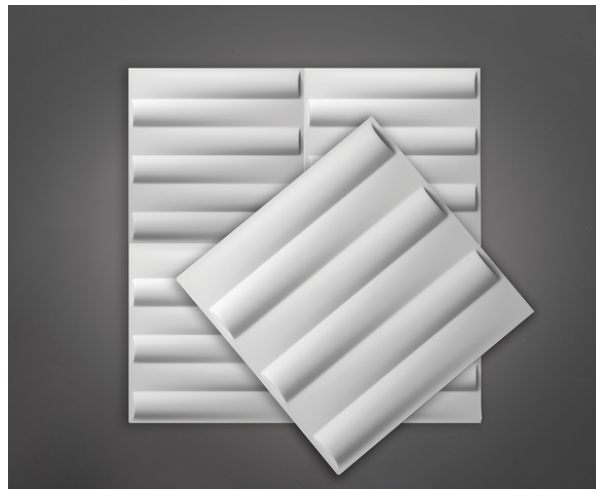

Passiones

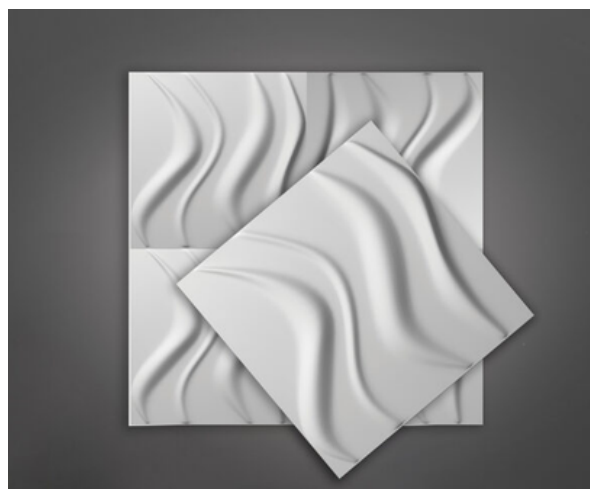

Wuthering Heights

Features and Benefits:

- **Eco Friendly. Made with plant fiber**
- **Easy to install. Stick directly onto wall using Acrylic Adhesive**
- **Paintable**
- **Light Weight**
- **Decorative Finish**




Art Blockz


500mm x 500mm



Diamond

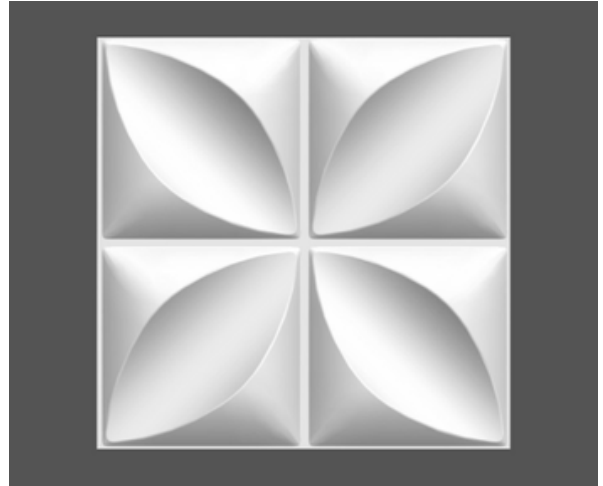


Petal

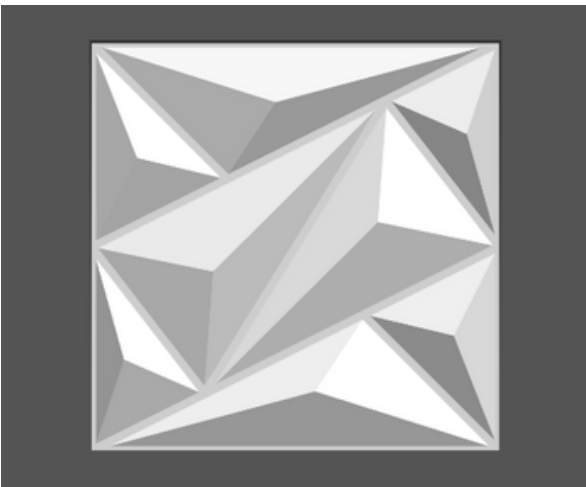


Prism



Vector

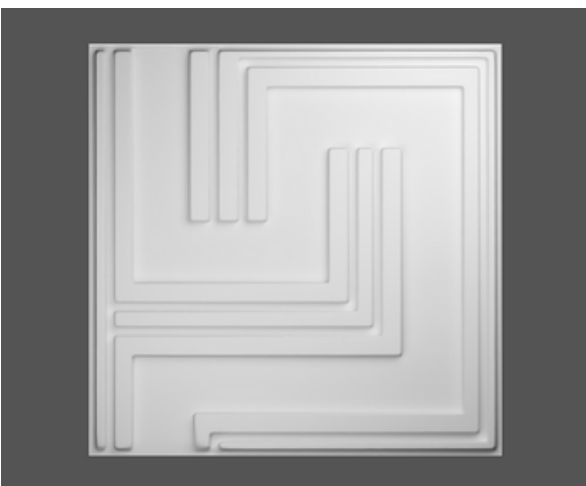

Vintage

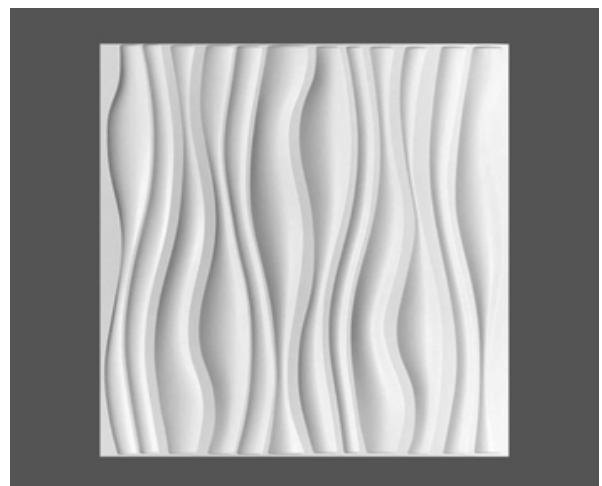

Wave

Bring your wall to life with our 3D Art Blockz. Its 3D design shifts lighting and casts shadows allowing it to draw emphasis on the patterns giving character to any space. Our 3D art Blockz can be painted or sprayed to compliment any setting and are available in a variety of designs. Easy to install. Customize and create your dream space using this design concept.

Wall Panel Dimensions:

- **Standard Length: 500mm**
- **Profile Width: 500mm**
- **Profile Height: 10-32mm**
- **Coverage /m: 0.25**
- **Mass /m: 0.33kg**

Product Composition:

- **PVC: 98.70%**
- **Monostearin: 1%**
- **Titanium Oxide: 0.10%**
- **CAST: 0.10%**
- **TOS: 0.10%**



Installation Guide


RECOMMENDED SUPPLIES:

3D WALL PANELS
CONTACT ADHESIVE
PAINT
ADHESIVE PAINT ROLLER
PAINT BRUSH, ROLLER OR PAINT SPRAYER
UTILITY KNIFE AND/OR POWER TOOLS
PUTTY KNIFE
LEVEL & RULER
PAINTERS TAPE
FINISH SANDING BLOCK/SANDPAPER

STEP 1 : SURFACE PREPARATION

3D wall panels are made for relatively flat and smooth surfaces. Ensure that the surface is clean, dry and free of loose debris before installation.


NOTE: Panels should acclimate for a minimum of 48 hours prior to installation. TIP: If a panel has a slight bow it can gently be flexed to lay flat before adhering to the wall. Minimize rubbing on panels that have not been primered.

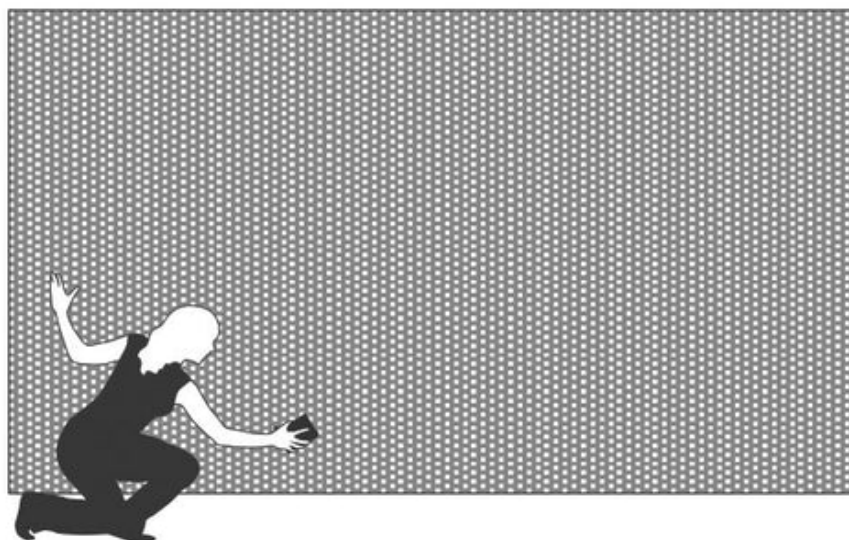

STEP 2 : PLANNING

Use a level to mark lines on the wall to ensure straightness and accuracy. Allow cut panels to fall in more inconspicuous areas like corners and the bottom of a wall. If working from the center out, panels that fall at edges may need to be cut. Plan your design well to ensure desired results. Remember, measure twice and cut once.

TIPS FOR CUTTING PANELS: Wall Flats can be cut with a standard utility knife or power tools. We recommend taping along cut lines or drill holes with painters tape to reduce pulp flair when using power tools. We recommend blades, bits, etc...designed for finishing work. When using power tools follow manufacturer's suggestions for use and safety.

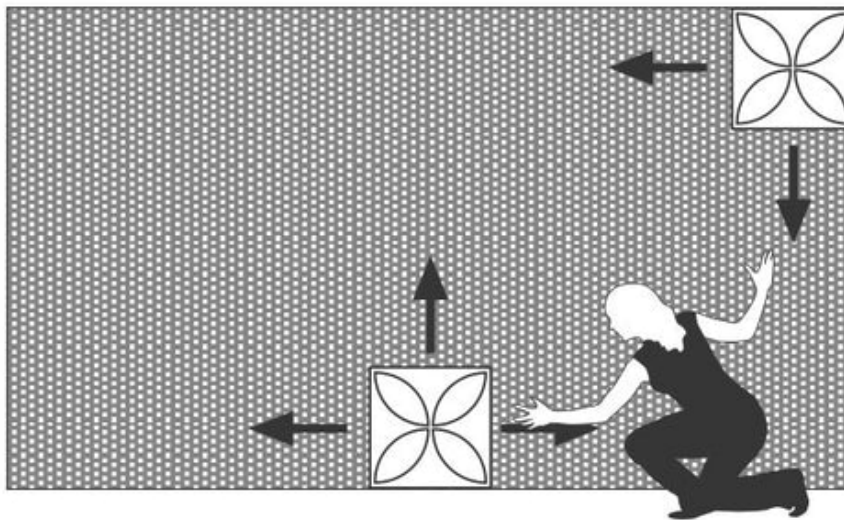

STEP 3 : 3D WALL PANEL INSTALLATION

Determine if the installation will be wall-to-wall, a floating design that leaves an even border, a strip of panels, etc... Plan well before beginning. If you are unsure, lay the panels out on the floor or sketch it out.


Apply the adhesive to the back on all four sides of the the 3D Wall panels. Apply two more vertical lines where possible.

Once panels are in place, apply pressure around the perimeter of the panel and other touchpoints to the wall to lock in place. When all the panels are installed, apply pressure to the entire flat surface to achieve a full bond.

After rolled re-positioning is not possible. (You can us tile spaces to position the next panel if needed. Clean the joints between the panels with a paper towel.

SEAMLESS INSTALLATION (OPTIONAL)

A modular product will have visible joints. If planned into the design there is no need for additional work. Most panels are designed in a manner that the design elements and spacing work to minimize joint appearance without additional finishing work. For a near seamless installation a 1/16" gap must be left evenly between the panels.

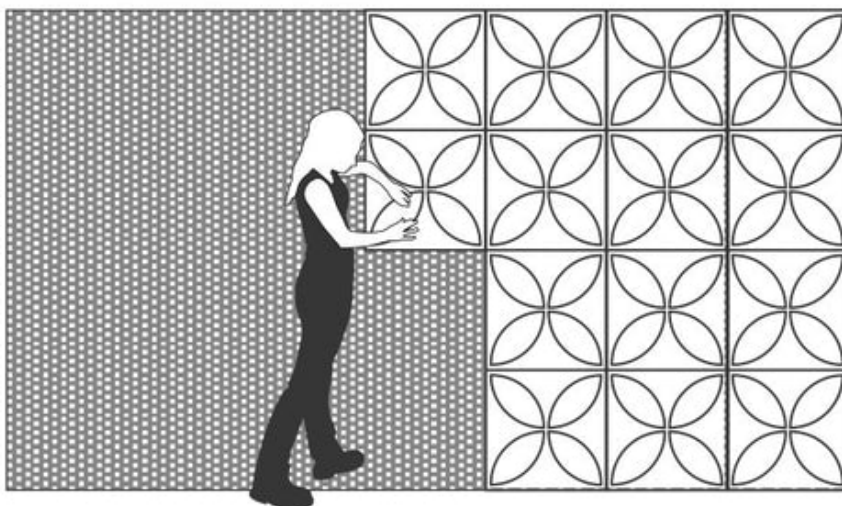


STEP 4 : FINISHING THE 3D WALL PANELS

Paint the 3D Wall panels in your desired color and let dry.

TIP: FINISHING AROUND OUTLETS AND SWITCHES

Use extension boxes for outlets and switches to bring them out past the Wall Flats. Cut panels to fit the box opening and finish caulk around edges.

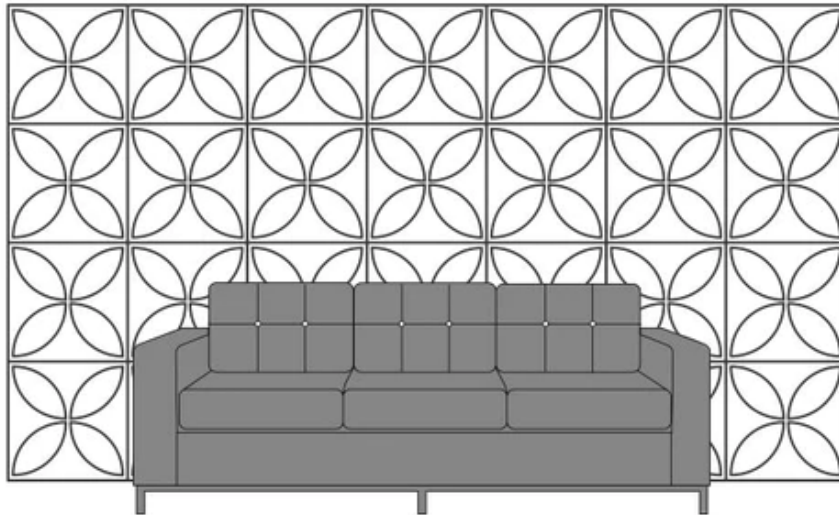

STEP 5 : ENJOY YOUR NEW LIVING SPACE

Paint the 3D Wall panels in your desired color and let dry.



E Designs & Installations

PVC CEILINGS

PVC/SPC FLOORING

ARTIFICIAL GRASS

082 899 4672

SALES1@EDESIGNSPVC.CO.ZA

JETVEST BUILDING UNIT 1& 2, 26 LANGA CRESCENT, CORRIDOR HILL, WITBANK

WWW.EDESIGNSPVC.CO.ZA